

Features

- Ultra Stable
- Wide Temperature Range
- Fast Warming-up
- Small Package

Applications


- Base Stations
- Instrumentations
- Medical Electronics
- Others


BO1220L Specifications

Parameter	Value			Unit	Conditions	
	Min.	Typ.	Max.			
Supply Voltage	–	3.3	–	V		
	–	5.0	–	V		
Power Consumption	–	–	3.0	W	During Warming-up	
	–	–	1.5	W	Steady at +25°C & Still air	
Frequency Range	10 ~ 40			MHz		
Nominal Frequency	10					
Initial Frequency Tolerance	–	–	±100	ppb	At shipment, nominal EFC, +25°C	
Freq. Stability Vs. Temp.	±20	–	±50	ppb	-20°C ~ +70°C	
	±50	–	±100	ppb	-40°C ~ +70°C	
	±50	–	±100	ppb	-40°C ~ +85°C	
	–	–	±200	ppb	-55°C ~ +85°C	
Sine Wave	Output Level	7	–	–	dBm	
	Harmonious	–	–	-30	dBc	
	Spurious	–	–	-70	dBc	
	Load	–	50	–	Ω	
LVTTTL	V _{OH}	2.4	–	–	V	LVTTTL Output, Load=15pf
	V _{OL}	–	–	0.4	V	LVTTTL Output, Load=15pf
	Duty Cycle	45	–	55	%	(V _{OH} - V _{OL})/2
	Rise/Fall edge	–	–	6	ns	LVTTTL Output, Load=15pf
	Load	–	15	–	pf	
Supply Sensitivity	–	–	±5	ppb	V _{cc} ±5%	
Load Sensitivity	–	–	±5		Load±5%	
Aging per Day	–	–	±2		After 30 days of operation	
Aging per Year	–	–	±200		After 30 days of operation	
SSB Phase Noise @10MHz	-95	–	–	dBc/Hz	Offset 10Hz	At +25°C
	-120	–	–		Offset 100Hz	
	-150	–	–		Offset 1kHz	
	-155	–	–		Offset 10kHz	
	-160	–	–		Offset 100kHz	
Control Voltage Range	0	–	3	V	3.3V	
	0	–	5	V	5V	
Frequency Turning Range	±0.5	–	±2.0	ppm		
Tuning Slope	Positive					
Environmental Conditions						
Operating Temperature Range	-55°C~+85°C					
Storage Temperature Range	-55°C~+125°C					

Reliability	
Parameter	Condition
Temperature Stress Test	IEC60068, GJB360B
Mechanical Stress Test	IEC60068, GJB360B
EMC Test (ESD)	IEC61000, JESD22
Solder Ability	EIA/JESD22-B102-C
RoHS	RoHS Directive 2011/65/EU Annex II Recasting 2002/95/EC

Outline Dimension & Pin Connections

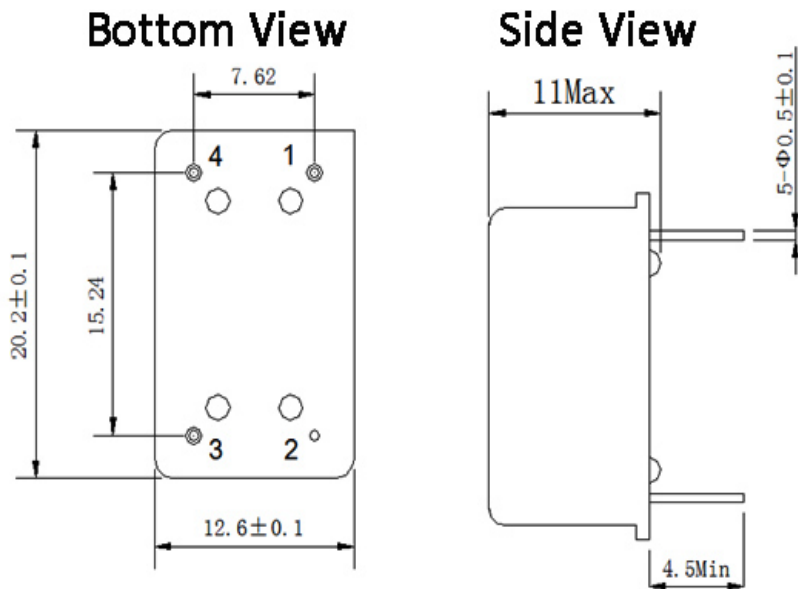

Pin Connections


Pin1	Vcon	Control Voltage
Pin2	GND	Ground, Case
Pin3	Fout	Output
Pin4	Vdd	Power Supply

Note:

Leave pin 1 unconnected if vcon is not used.

Ordering Guide

BO 1220 L X X X XXX X X XX.XX

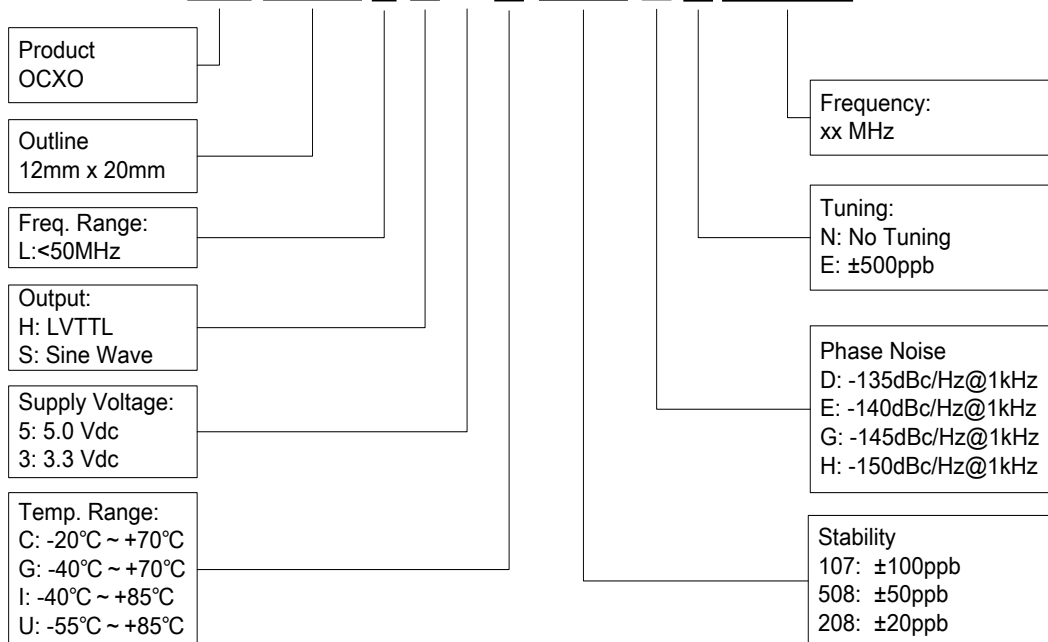

Example: BO1220LH5C107DN10

Disclaimer

Xtaltq Technologies Co., Limited reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.