
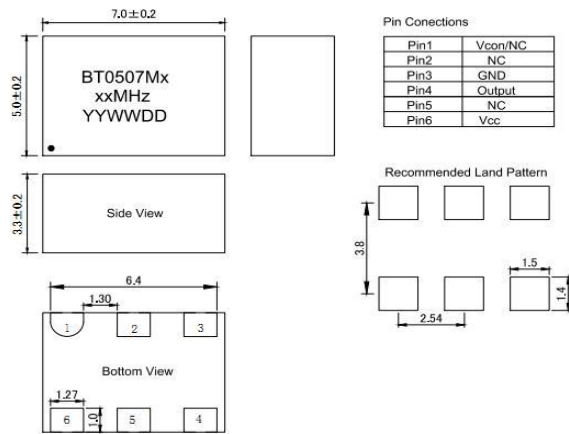


Features				Applications		
<ul style="list-style-type: none"> ● Ultra Low Phase Noise ● Wide Temperature Range ● SMD Package(7.0×5.0mm) 				<ul style="list-style-type: none"> ● Base Stations ● Instrumentations ● Synthesizer ● SDH/SONET ● Medical Electronics 		
						
BT0507M Specifications						
Parameter	Value			Unit	Conditions	
	Min.	Typ.	Max.			
Supply Voltage	-	3.3	-	V	Vcc±5%	
	-	5	-	V	Vcc±5%	
Supply Current	-	-	35	mA	-40°C~+85°C	
Frequency Range	80~ 125			MHz		
Nominal Frequency	80, 100, 120, 122.88			MHz		
Initial Frequency Tolerance	±0.50	±1.0	±2.0	ppm	At shipment, nominal EFC, +25°C	
Freq. Stability Vs. Temp.	±0.28	±0.5	±2	ppm	-40°C~+85°C	
HCMOS	V _{OH}	2.4	-	-	V	HCMOS Output, Load=15pf
	V _{OL}	-	-	0.4	V	HCMOS Output, Load=15pf
	Duty Cycle	45	-	55	%	(V _{OH} - V _{OL})/2
	Rise/Fall Edge	-	-	6	ns	HCMOS Output, Load=15pf
	Load	-	-	15	pf	
RMS Jitter(By E5052B)	-	-	1.3	ps	12KHz~5MHz	
Supply Sensitivity	-	-	±0.1	ppm	Vcc±5%	
Load Sensitivity	-	-	±0.2		Load±5%	
Aging/ First Year	-	-	±1.0		Standard	
SSB Phase Noise @100MHz	-92	-85	-80	dBc/Hz	Offset 10Hz	At +25°C
	-125	-120	-110		Offset 100Hz	
	-146	-142	-140		Offset 1kHz	
	-159	-157	-155		Offset 10kHz	
	-167	-165	-162		Offset 100kHz	
Control Voltage Range	1.5 ± 1.0			V		
Frequency Tuning Range	±5	-	-	ppm		
Tuning Slope	positive					
Non-linearity	-	-	10	%		
Input impedance	100	-	-	KΩ		
Environmental Conditions						
Operating Temperature Range	-55°C~+95°C					
Storage Temperature Range	-40~+85°C					

Outline Dimension & Pin Connections



Maximum Ratings


Parameter	Symbol	Rating
Supply Voltage	Vdd	-0.5V / 6V
Control Voltage	Vcon	0V / 3V
ESD, HBM/CDM/MM		4KV/ 2KV/ 200V

Reliability

Parameter	Condition
Temperature Stress Test	IEC60068, GJB360B
Mechanical Stress Test	IEC60068, GJB360B
EMC Test (ESD)	IEC61000, JESD22
Solderability	EIA/JESD22-B102-C
Contact Pads	Gold over Nickel
RoHS	RoHS Directive 2011/65/EU Annex II Recasting 2002/95/EC

Ordering Guide

BT 0507 M X X X XXX X X XX.XX

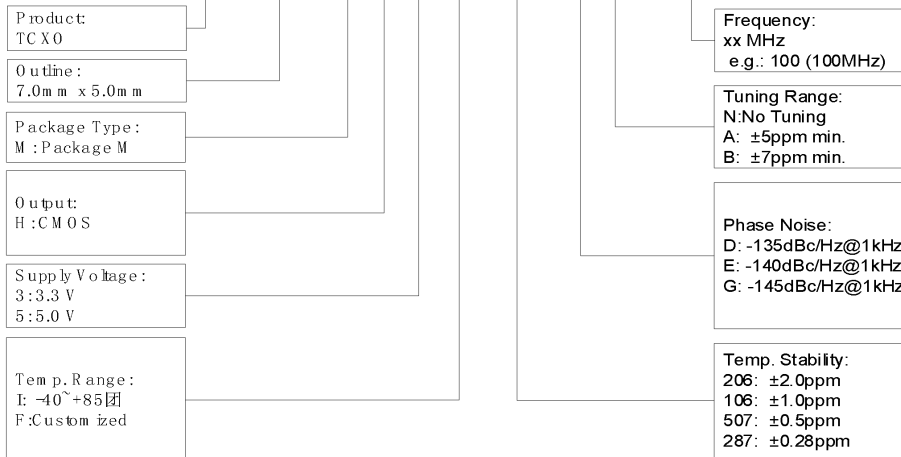

Disclaimer

XtalTQ Technologies Co., Limited reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.